


X3™ Slickline

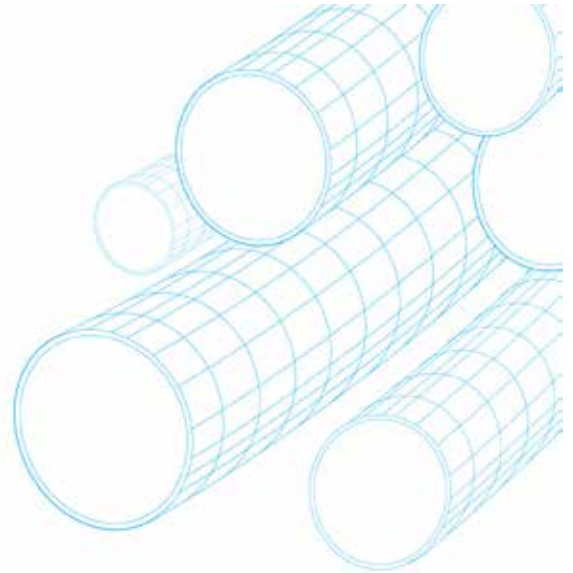

Specifications					
Wire Diameter	Approximate Weight	Minimum Breaking Load	Minimum Sheave Diameter	Torsions	Wrap
inches mm	lbs/Kft Kg/Km	Lbf Kgf	inches	#	Turns
0.066 ± 0.0005 1.676 ± 0.012	12 17.7	1300 591	8	27	8
0.072 ± 0.0005 1.829 ± 0.012	14 20.8	1486 675	9	27	8
0.082 ± 0.0005 2.083 ± 0.012	18 26.8	1848 840	10	24	8
0.092 ± 0.0005 2.337 ± 0.012	23 34.2	2227 1012	11	21	8
0.108 ± 0.0005 2.743 ± 0.012	32 47.6	2886 1312	13	17	8
0.125 ± 0.0005 3.175 ± 0.012	42 62.5	3743 1729	15	15	8
0.140 ± 0.0005 3.556 ± 0.012	54 80.4	4618 2099	17	13	8
0.160 ± 0.0005 4.064 ± 0.012	69 102.7	5630 2559	19	11	8

Features:

- ▶ Camesa Slickline products are produced per American Petroleum Institute 9A where applicable.
- ▶ XXXIP Grade Wire with corrosion protective zinc layer
- ▶ Wrap test is performed around wire's own diameter